



NOTE : MEANS OF DISCONNECT MAY BE REQUIRED TO COMPLY WITH THE NEC WHEN THE DISTRIBUTION PANEL IS LOCATED UNDER THE COUNTER. COMPLIANCE WITH THE NEC IS THE RESPONSIBILITY OF THE PURCHASER OF THE BUILDING.

PLAN VIEW (N.T.S.)

NOTE : BUILDING HEIGHT WITHOUT EXTERIOR ROOF - 86 9/16"

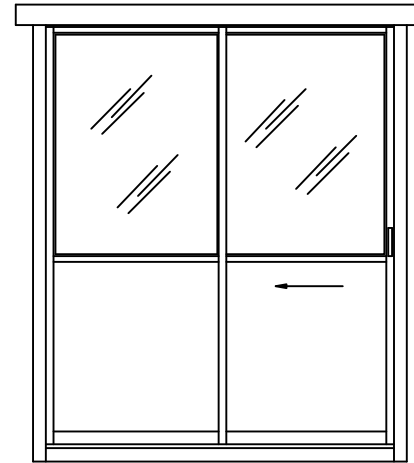

ELEVATION A

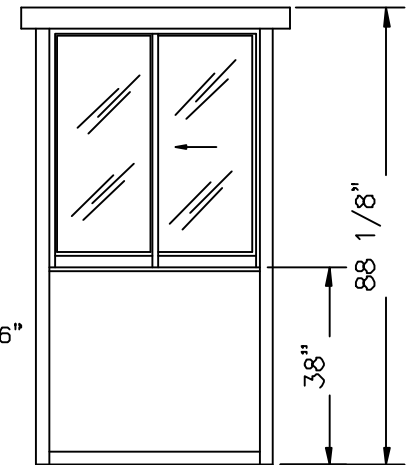

ELEVATION B

STANDARD ITEMS FOR AN ECONO 7648DSL DURALUMINUM BUILDING

- ① — 100 AMP SINGLE PHASE 12 CIRCUIT MAIN LOAD CENTER
- ② — 115V DUPLEX, 230V OUTLET
- ③ — 40 WATT LIGHT FIXTURE
- ④ — 22" DEEP SHELF
- ⑤ — 3" OVERHANG EXTERIOR ROOF (OPTIONAL)
(REFER TO DURALUMINUM ECONO SPECIFICATIONS FOR TYPICAL CONSTRUCTION)

PORTA-KING BUILDING SYSTEMS

4133 SHORELINE DRIVE EARTH CITY, MISSOURI 63045
1-800-456-5464 FAX 314-291-2857 www.portaking.com

TITLE

DURALUMINUM ECONO 7648DSL